



# PRODUCT BRIEF

## MM6108 OVERVIEW

IEEE 802.11ah Sub-1 GHz 1/2/4/8 MHz BW MAC/PHY/Radio Wi-Fi HaLow SoC



Morse Micro  
reaching farther™

## Overview

Morse Micro provides a complete Wi-Fi HaLow connectivity solution. The MM6108 SoC is a single-chip solution, including Radio, PHY, and MAC sections designed in accordance with the IEEE 802.11ah standard, supporting data rates up to 32.5 Mbps. The standard provides for operation in the sub 1GHz license exempt RF bands. The radio in the MM6108 supports programmable operation in these bands, worldwide, between 850MHz and 950MHz.

The RF interface for the MM6108 includes the option to use either the on-chip amplification for typical low-power,


low-cost devices, or in conjunction with an external PCB-mount power amplifier (PA) or Front-End Module (FEM) for ultra-long-reach applications. The RF receiver features a high linearity LNA, making the use of external filters unnecessary in many applications.

Battery-operated applications are supported by a combination of features in the MM6108. The IEEE 802.11ah standard provides for extended sleep times of battery-operated STA client devices, with longer durations than other prior IEEE 802.11a/b/g/n/ac generations.

### For Internet of Things (IoT) and Machine-to-Machine (M2M) applications:



- ✓ Surveillance cameras and sensors
- ✓ Cloud connectivity
- ✓ Building automation systems (BAS)
- ✓ Machine performance monitors and sensors
- ✓ Building access control & security
- ✓ Drone video and navigation communications
- ✓ Rural internet access
- ✓ Utility smart meter and intelligent grid
- ✓ Industrial automation controls
- ✓ Smart home automation
- ✓ Wi-Fi HaLow access points and bridges
- ✓ Wi-Fi HaLow client adapters/dongles
- ✓ Smart city network

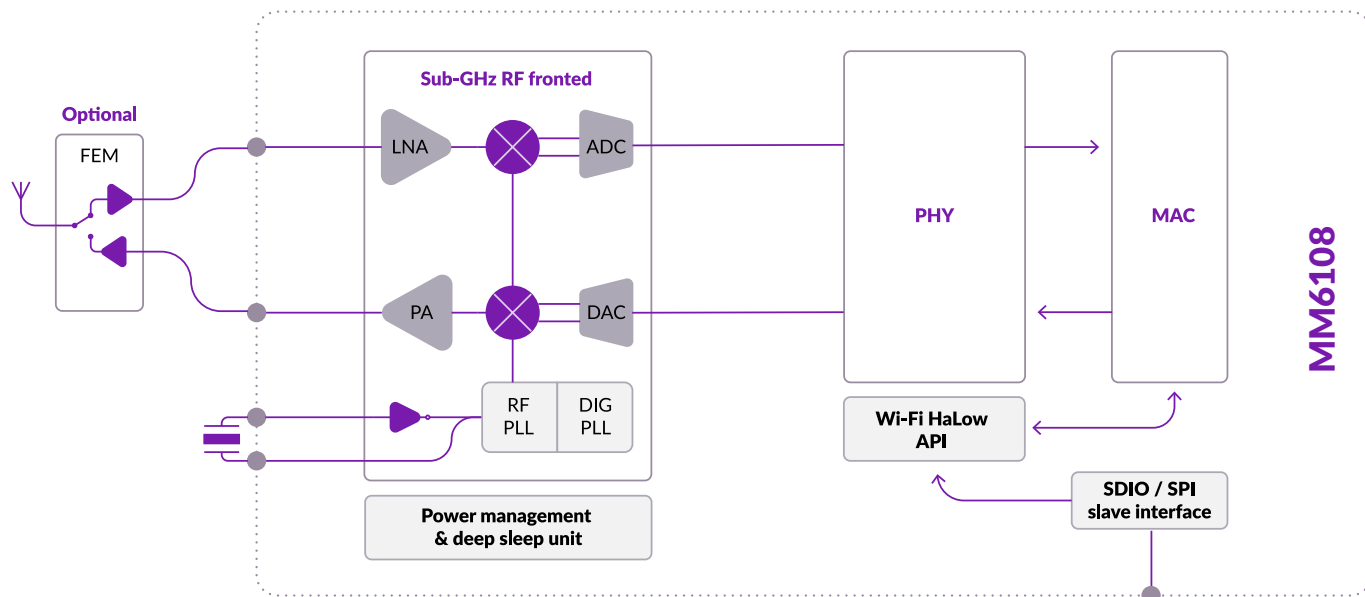

Single-chip IEEE802.11ah Wi-Fi HaLow transceiver for low-power, long-reach IoT



Radio supporting worldwide sub 1GHz bands



Single-stream max data rate of 32.5 Mbps



On-chip power amplifier, external FEM option



6 x 6 x 0.85 mm QFN48 package



Power management unit (PMU) supporting ultra-low-power operation



SDIO 2.0 and SPI host interface options



GPIO/UART/I2C/ PWM peripheral options



WPA3 security



1/2/4/8 MHz channel bandwidth

## Wi-Fi HaLow modulation and coding scheme

| MCS index | Modulation scheme | Coding rate | Phy rate (kbps) per BW |       |       |       |
|-----------|-------------------|-------------|------------------------|-------|-------|-------|
|           |                   |             | 1 MHz                  | 2 MHz | 4 MHz | 8 MHz |
| 10        | BPSK              | 1/2 x 2     | 167                    | N/A   |       |       |
| 0         | BPSK              | 1/2         | 333                    | 722   | 1500  | 3250  |
| 1         | QPSK              | 1/2         | 667                    | 1444  | 3000  | 6500  |
| 2         | QPSK              | 3/4         | 1000                   | 2167  | 4500  | 9750  |
| 3         | 16-QAM            | 1/2         | 1333                   | 2889  | 6000  | 13000 |
| 4         | 16-QAM            | 3/4         | 2000                   | 4333  | 9000  | 19500 |
| 5         | 64-QAM            | 2/3         | 2667                   | 5778  | 12000 | 26000 |
| 6         | 64-QAM            | 3/4         | 3000                   | 6500  | 13500 | 29250 |
| 7         | 64-QAM            | 5/6         | 3333                   | 7222  | 15000 | 32500 |

## Contact us

Morse Micro Pty Ltd Corporate Headquarters

Level 8, 10-14 Waterloo Street, Surry Hills  
NSW 2010, Australia